

Hikvision Analog Speaker
Smarter audio, made easy

Hikvision Analog Speaker

Smarter audio, made easy



www.hikvision.com
support@hikvision.com



Distributor Address

Meet **Analog Speaker**

Elevate your audio experience with Hikvision's analog speakers. Ideally suited for Small and Medium-sized Businesses (SMB) contexts, these speakers blend sleek design with user-friendly access and operation. Set the perfect tone for your customers and create an immersive atmosphere they won't forget.

Key Features

Flexible control with the amplifier

- Multiple audio input **MIC/USB/Bluetooth/RCA**
- Two-zone volume adjustment
- Solid 60W output
- **Constant voltage/Constant resistance**

Enhanced durability

The column speaker with the **weather-resistant** design ensures a worry-free outdoor use even in extreme conditions.

Rich, immersive sound

The horn speaker with a maximum loud pressure level of **120dB** and **multiple power** levels, ensure clear and resonant sound over a long coverage area.



Application Scenarios


Create more possibilities for SMB (small and medium-sized businesses) scenarios



Shops



Cafes




Restaurants



Parking Lots



Offices

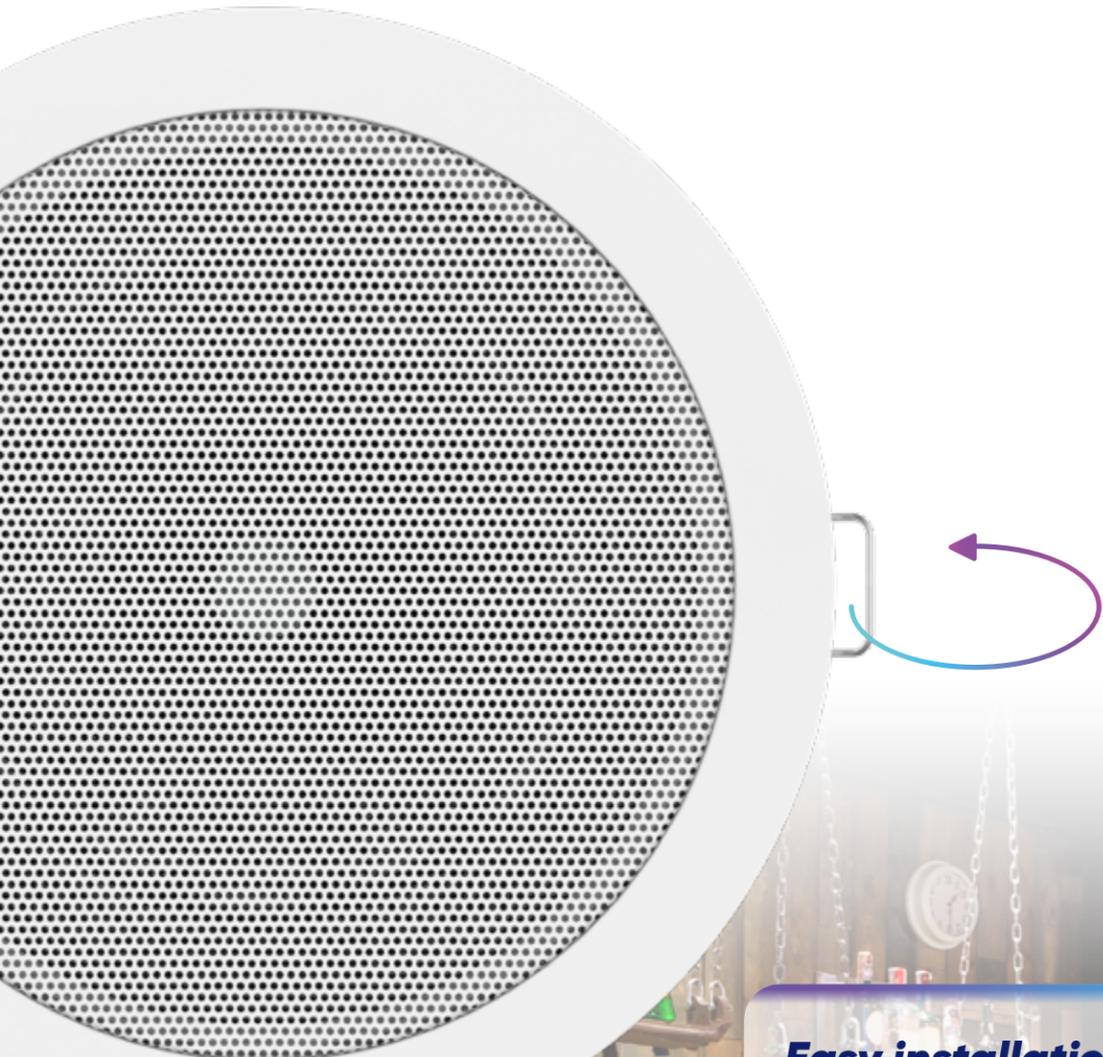

HIKVISION

Easy installation

The **ergonomic design** and **spring clamp mechanism** make ceiling speakers installation easier and more secure.

Vertical or **horizontal installation** allows cabinet speakers to adapt to different scene requirements.



Sleek and stylish design

The **classic** and **elegant white** design seamlessly blends with any environment, enhancing the overall ambiance.

100V

Zone A: DS-QAE0206G1-V Ceiling Speaker 6W x 4

Zone B: DS-QAE0206G1-V Ceiling Speaker 6W x 4

DS-QAE0A60G1-VB (60W)

		Speaker						Interface	General				Approval
	Product Model	Impedance	Speaker Unit	Rated Power	Max. Acoustic Pressure	Sensitivity	Frequency Response	Audio In	Material	Dimension	Weight	Mounting Hole Dimension	Protection
Horn 	DS-QAE0330G1T-V	8 Ω	34-core 2-inch mid-to-high (dome resin film)	70V: 2.5W/5W/7.5W/15W/30W 100V: 5W/10W/15W/30W	120 dB SPL	108 dB ± 3 dB	250 Hz to 8 kHz	Constant Pressure Input 70V/100V	ABS	240 mm × 220mm × 165mm	Approx. 1.48kg	/	IP65
Ceiling 	DS-QAE0203G1-V	8 Ω	5.25" × 1	3 W	95 dB	91 dB ± 3 dB	90 Hz to 20 kHz	Rated voltage, 100 V	Shell: ABS; Mesh enclosure: iron mesh	Ø170 × 64 mm (Ø6.69" × 2.52")	Approx. 435 g (0.96 lb.)	Ø148 mm (Ø5.83")	/
	DS-QAE0206G1-V	8 Ω	5.25" × 1	6 W	98 dB	91 dB ± 3 dB	90 Hz to 20 kHz	Rated voltage, 100 V	Shell: ABS; Mesh enclosure: iron mesh	Ø170 × 64 mm (Ø6.69" × 2.52")	Approx. 468.5 g (1.03 lb.)	Ø148 mm (Ø5.83")	/
	DS-QAE0203G1E-V	8 Ω	5.25" × 1	3 W	95 dB	91 dB ± 3 dB	90 Hz to 20 kHz	Rated voltage, 100 V	Shell: ABS; Mesh enclosure: iron	Ø170 × 64 mm (Ø6.69" × 2.52")	Approx. 435 g (0.96 lb.)	Ø148 mm (Ø5.83")	/
	DS-QAE0206G1E-V	8 Ω	5.25" × 1	6 W	98 dB	91 dB ± 3 dB	90 Hz to 20 kHz	Rated voltage, 100 V	Shell: ABS; Mesh enclosure: iron	Ø170 × 64 mm (Ø6.69" × 2.52")	Approx. 468.5 g (1.03 lb.)	Ø148 mm (Ø5.83")	/
Column 	DS-QAE0420G1-V	8 Ω	Full frequency 4" × 1, high frequency 0.75" × 1	20 W	96 dB SPL	89.5 dB ± 3 dB	100 Hz to 20 kHz	Green end (terminal block), constant voltage input: 100 V, COM	Front cover: steel mesh, back cover: plastic	280 mm × 161.9 mm × 119.8 mm (11.02" × 6.37" × 4.72")	Approx. 1862.4 g (4.11 lb.)	/	IP66
Cabinet 	DS-QAE0120G1R DS-QAE0120G1R/ BLACK	8 Ω	Full frequency 5.25" × 1	70V: 5W/10W/15W/20W 100V: 5W/10W/15W/20W	103 dB SPL	90 dB ± 3 dB	100 Hz to 18 kHz	Fixed pressure in 100V/Fixed pressure in 70V/Fixed resistance input 8 Ω × 1	Metal and plastic	270.3mm × 182.5 mm × 125.0 mm	Approx. 2 kg	/	/

		Audio		Interface				General			
	Product Model	Rated Power	Frequency Response	Audio In	Audio Out	LED Indicator	Volume Knob	USB	Material	Dimension	Weight
Analog Amplifier 	DS-QAE0A60G1-VB	60 W 24 VDC	USB, Bluetooth: 20 Hz to 20 kHz MIC, RCA Input: 20 Hz to 8 kHz	6.5 mm Microphone × 1 USB 2.0 × 1 RCA × 1 Bluetooth	Constant Voltage Output × 2, 100 V COM Constant Resistance Output × 2, 30 W 4 Ω to 8 Ω RCA Input × 1 RCA Cascading × 1 Bluetooth	Power indicator (solid white): the device is normally working USB flash drive indicator (solid white): the device is in USB mode Bluetooth indicator (solid blue): the device is in Bluetooth mode	MIC Volume Knob × 1, Partition 1 Volume Knob × 1, Partition 2 Volume Knob × 1	USB2.0	Plastic	190.8 mm × 230.8 mm × 51.2 mm (7.48" × 9.06" × 2.01")	Approx. 1445.5 g (3.19 lb.)