



**Configure the Villa Door Station
Using the AP Mode**

Title:	Configure the device using AP mode	Version:	V2.0	Date:	15/6/2023
Product:	KV6113(C),KV8113(C), KV8213 (C) ,KV8413 (C)			Page:	1 of 2


Preparation

1. Villa door station with C version, making sure the device supports Wi-Fi function.
2. The device firmware making sure is the latest

Configure the Device using AP Mode

Method 1. Enable the AP function on the door station's Webpage.

- 1) Make sure the device enables the device hotspot

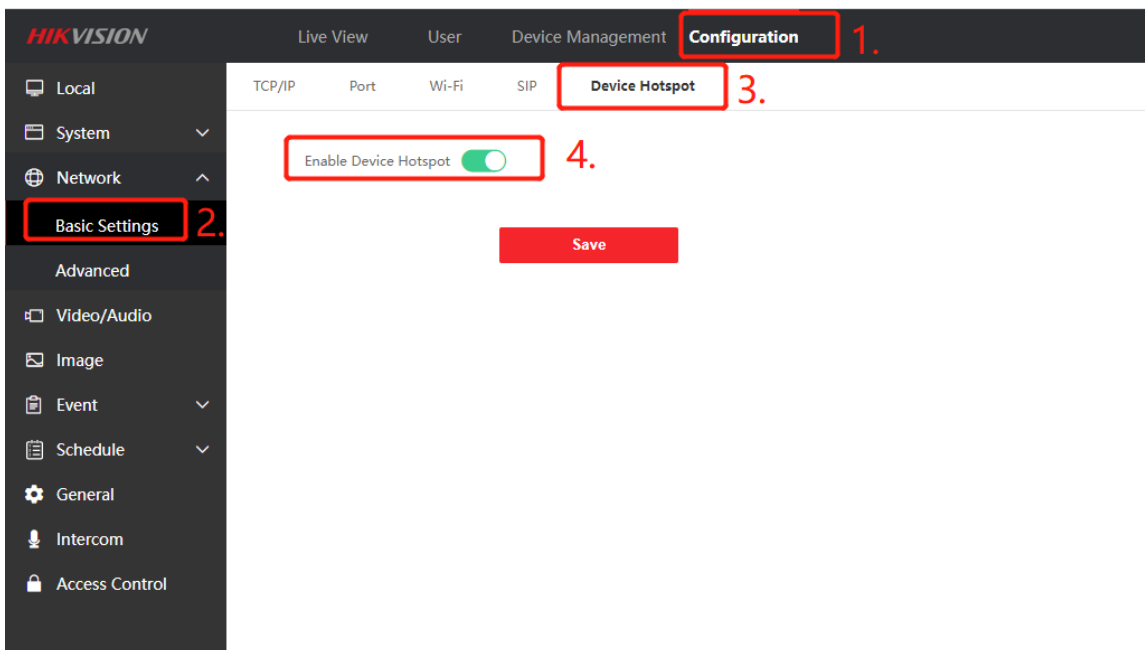

- 2) Observation of the device indicator flash means the device already enters the AP mode.

Method 2. Entering the AP mode by long-press the call button.

When long press the call button, the indicator will flash server times. This means the device enters the AP mode.




aac6eb6f71abca
34a2250a7fcf87e.

Connect to the device's hotspot.

- 3) Searching the device's hotspot using a mobile phone.
- 4) Connect to the device hotspot. The hotspot password is the same as the device's password.

- 5) Checking the device IP. At this time the device is a router, so the device IP is the router IP.
- 6) Enter the device IP on the mobile phone then configure the device.

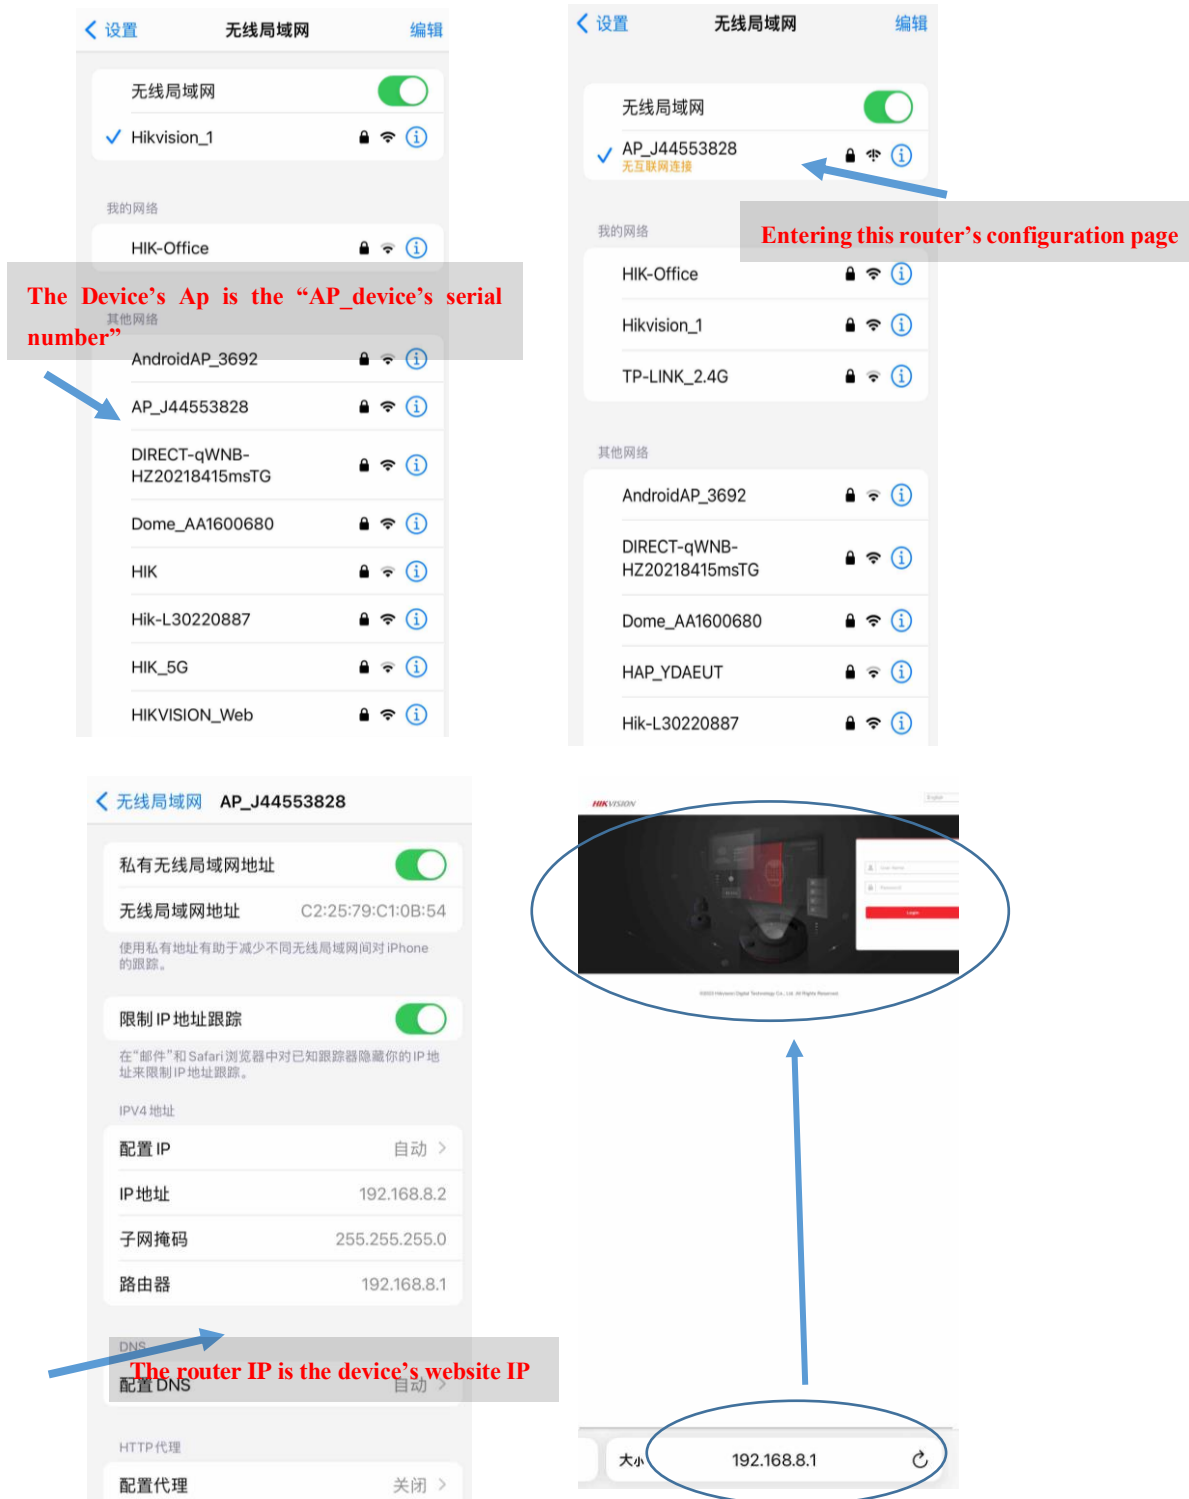

Note:

1. When the device enters the AP mode. The device can't connect to WIFI at the same time.



See Far, Go Further