

DS-PD1-TP-W

How to reset and connect

(2019-12-19)

Wireless temperature detector parameters

RF transmission distance	300m (open area)
Tamper Switch	YES
Detection method	Touch
Working Temperature	-10°C ~ +55°C
Working Humidity	≤95%RH
Dimensions (mm)	73 x 52 x 21

Wireless temperature detector appearance



How to power the wireless temperature detector

1. Powered by CR2450 battery




Title:	DS-PD1-TP-W How to reset and connect	Version:	v1.0	Date:	19/12/2019
Product:	Alarm	Page:	2 of 4		



How to add wireless temperature detector

1. Click the wireless security control panel function button

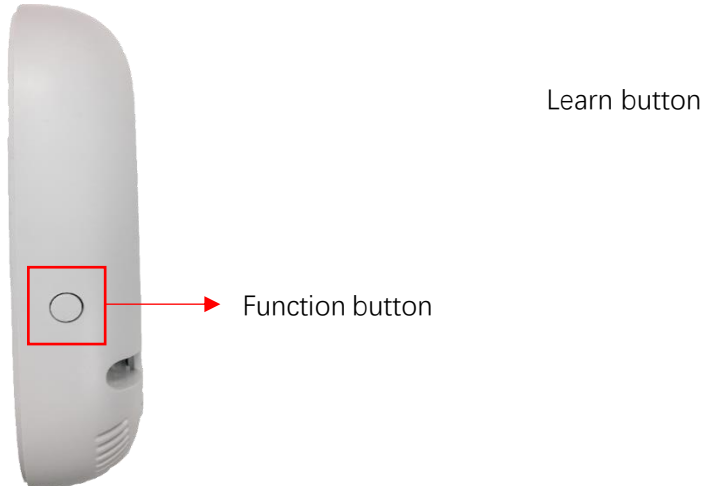


2. Power on the wireless temperature detector, then Click the learn button



3. Wireless security control panel will say 'The temperature detector is added to zone 1', the addition is successful
4. Click wireless security control panel function button again to finish the adding mode

How to reset the wireless temperature detector

1. Hold down learn button of wireless temperature detector, and then power on the device

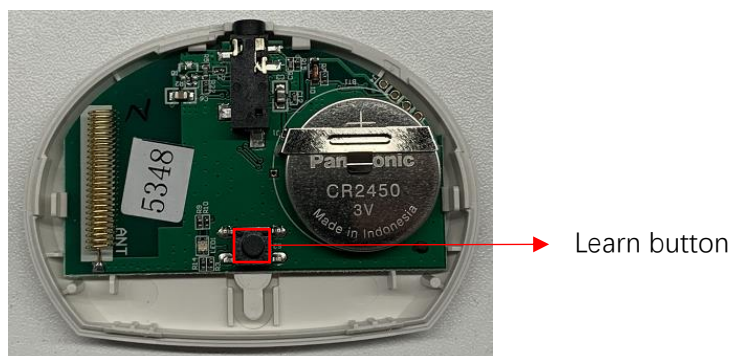

2. Hold down the button, after red light flash 3 times, means reset successfully, as below

Title:	DS-PD1-TP-W How to reset and connect	Version:	v1.0	Date:	19/12/2019
Product:	Alarm	Page:	3 of 4		

HIKVISION



Title:	DS-PD1-TP-W How to reset and connect	Version:	v1.0	Date:	19/12/2019
Product:	Alarm	Page:	4 of 4		



First Choice for Security Professionals
***HIK*VISION Technical Support**