

● **HOW TO**

Use Indoor Station 1.0 and 2.0 Protocol Together




Introduction

The following content will help you know how to improve compatibility between indoor station firmware versions. If you want to use both the 1.0 and 2.0 protocols of the indoor station together, you must first enable SIP 1.0.

Check Mixed Protocol Usage in Indoor Stations

Turn to Setting > Advanced Settings > Device Information, and check version. If all device firmware versions are V2.1.10 or higher, or all are below V2.1.10, you can use them without further action.

However, **if one device is V2.1.10 or higher and the other is below V2.1.10, you must enable SIP 1.0** (see the next section for details)

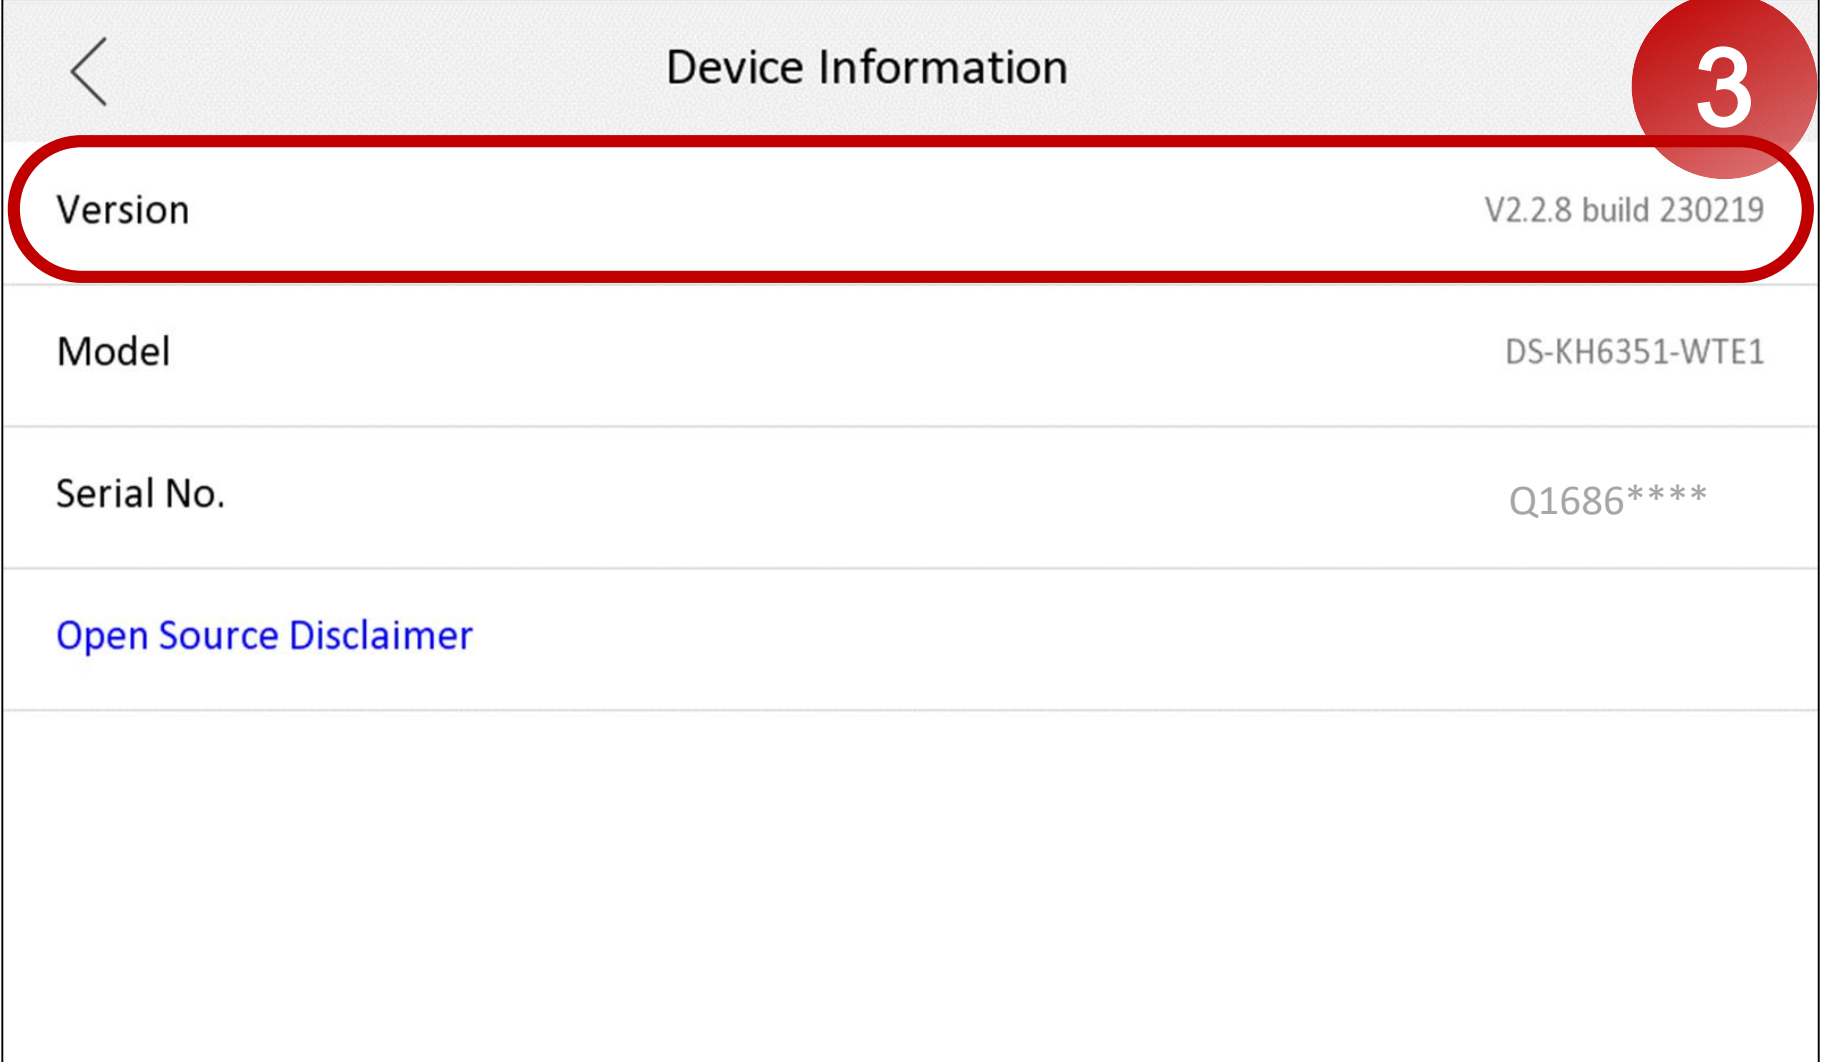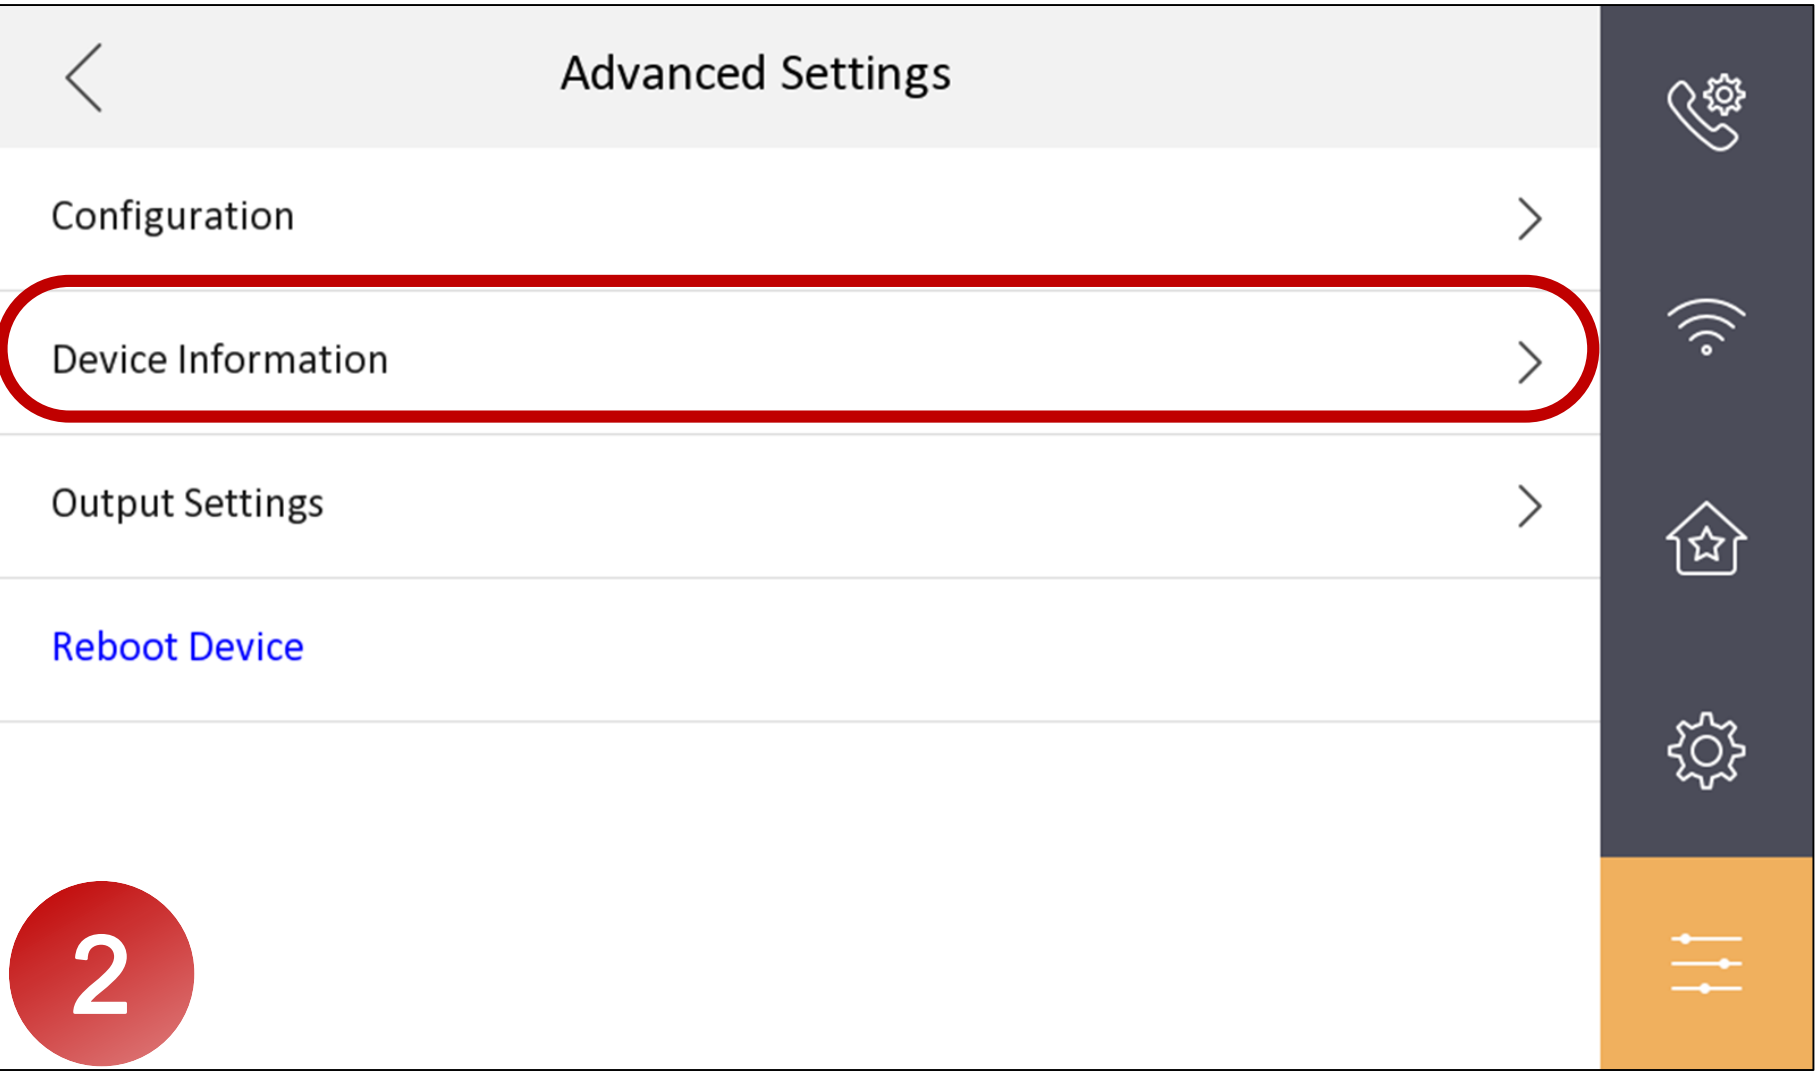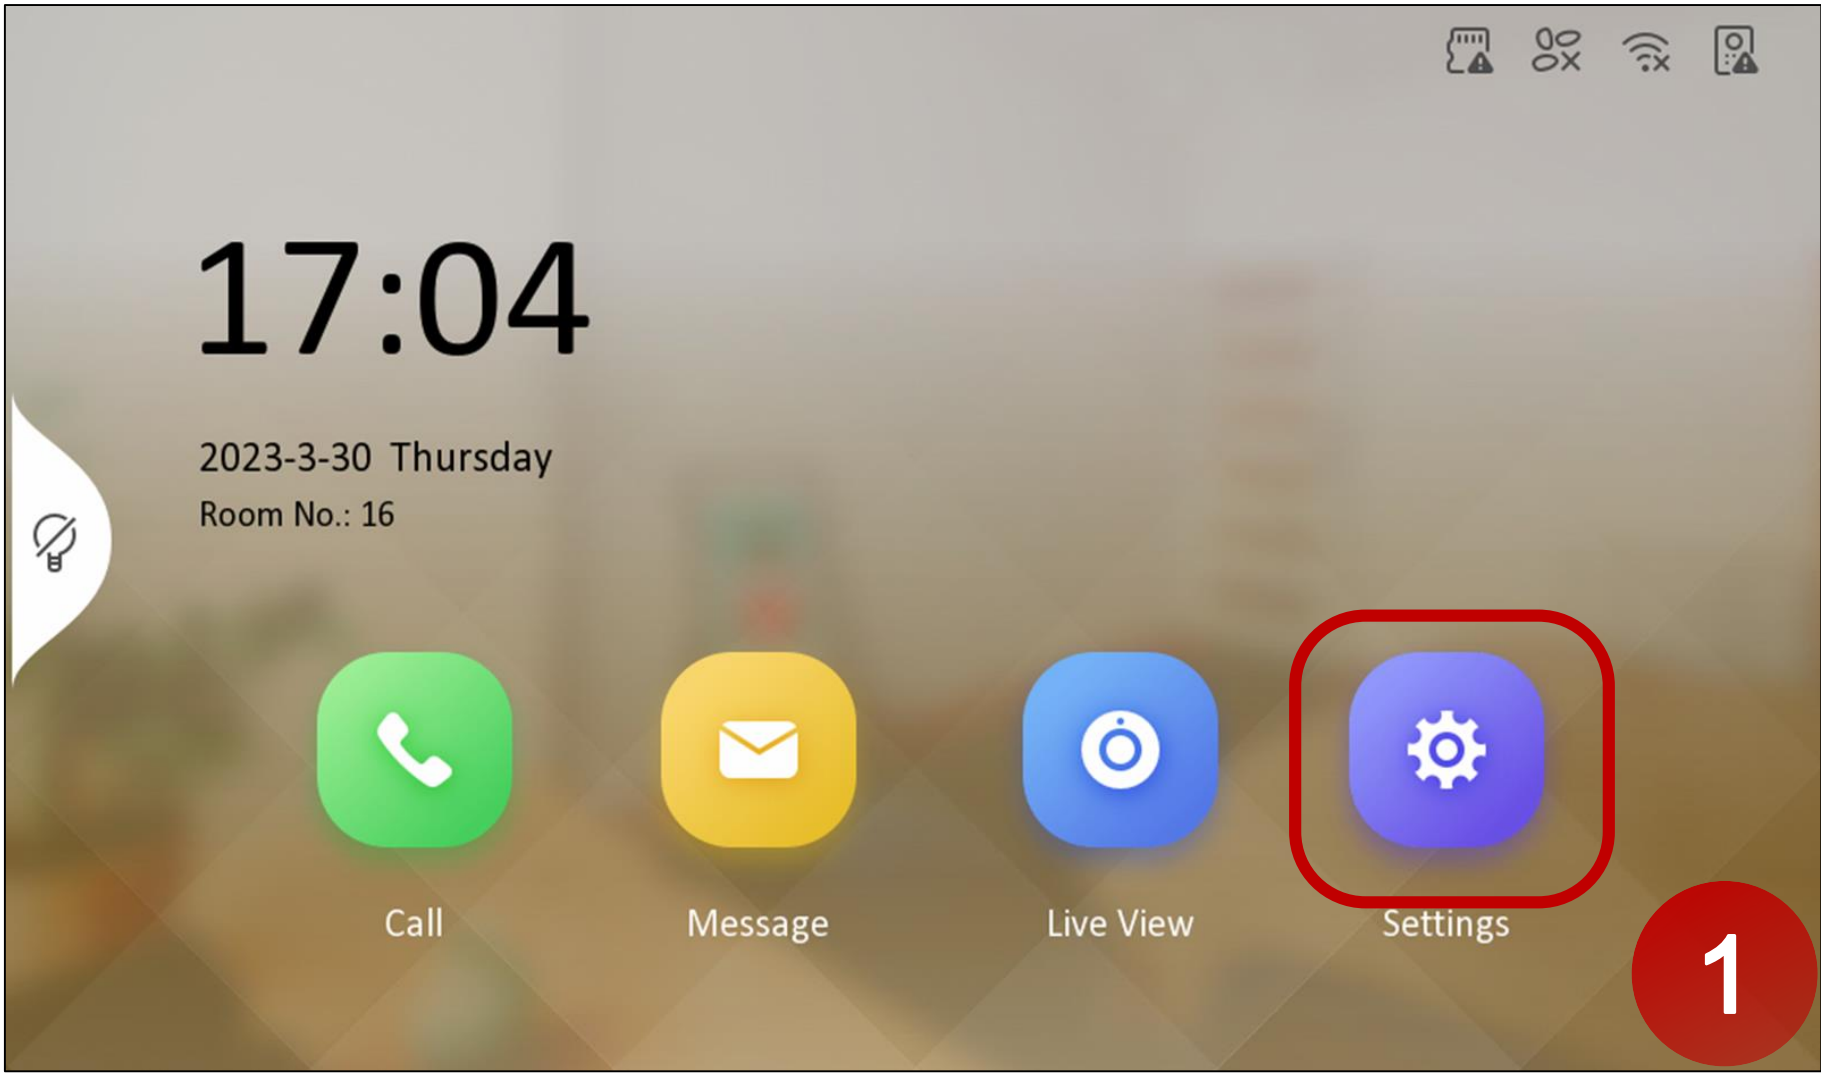

Firmware Version of Indoor Station	Protocol Type
V2.1.10 and above	Protocol 2.0
V2.1.2	Protocol 1.0
V1.X.X	Protocol.0

Portal Page Configuration

Turn to Setting > Advanced Settings > Configuration > SIP Settings, then enable *Compatible with SIP 1.0 indoor station* . Once you enable this feature, the indoor station that uses protocol 2.0 will work like one with protocol 1.0. This allows you to connect and use it with the indoor station with protocol 1.0.

