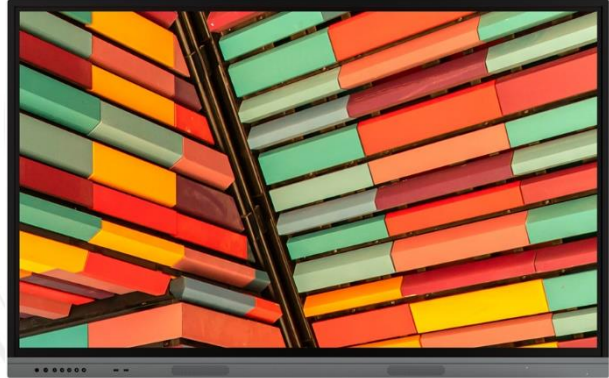


DS-D5B65RD/C
65-inch 4K Interactive Display**▪ Specification**

Product Model	
Product Model	DS-D5B65RD/C
Display	
Screen Size	65 inch
Backlight	DLED
Resolution	3840 × 2160 @60 Hz
Brightness	325 cd/m ² (Typ.)
Color Depth	10 bit
Response Time	8 ms
Panel Type	VA
Contrast Ratio	5000:1 (Static)
Color Gamut	72% NTSC (CIE1931) (Typ.)
Refresh Rate	60 Hz
Viewing Angle	178°(H)/178°(V)
Aspect Ratio	16:9
Surface Glass	4 mm Anti-Glare Glass
Life Span	50000 hrs

Touch	
Type	Infrared Touch Screen
Touch Point	40-point multi-touch
Touch Response Time	< 5 ms
Minimum Touch Object	≥ 2 mm (≥ 90% touching area)
Touch Precision	± 1 mm (≥ 90% touching area)
Touch Resolution	32767 × 32767
Built-in System	
Operation System	Android 14.0
Memory	8 GB
Built-in Storage	128 GB
Internal Function	
Loudspeaker	Built-in 2 × 16 W
Bluetooth	Built-in BLE (Bluetooth Low Energy) module supports Bluetooth 5.0
Interface	
Video & Audio Input	HDMI In× 2, VGA In x1, Audio In × 1
Video & Audio Output	Audio Out × 1
Control Interface	TOUCH-USB× 1, RS232 × 1
Network Interface	LAN (100 Mbps) × 1 WIFI AP&Station, 2.4G/5G IEEE 802.11 a/b/g/n/ac
Data Transmission Interface	USB 3.0 × 3, USB 2.0 × 1
Power	
Power Supply	100 to 240 VAC, 50/60 Hz
Standby Consumption	≤ 0.5 W
Max. Consumption	350 W
General	
Product Dimensions	1484.6×903.08×87.2mm
Package Dimensions (W × H × D)	1630×220×1050mm
VESA	500 mm × 400 mm
Net Weight	41.2±1KG
Gross Weight	48.2±1KG
Working Environment	
Working Temperature	0 °C to 40 °C (32 °F to 104°F)
Working Humidity	10%~90% RH

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.

