

AE-MH0408 Series Mobile Video Recorder

AE-MH0408 series Hybrid DVR is a professional solution to vehicle video and audio management with built-in Linux operating system. It supports CVBS video and audio output, featuring HD encoding/decoding, transmission based on 4G wireless network, satellite positioning, secure data storage, HDD vibration absorber, alarm input/output, driving information collecting and ports added for peripheral devices. It provides camera selection and coding solutions specialized in video and audio recording management for public transports, school buses, taxis, learner-driven vehicles, trucks, etc. The product also supports extended features like abnormal detection, which can improve traffic security and reduce the vehicle accident.



▪ Application

The anti-corrosion performance level of AE-MH0408 series Hybrid DVR is standard. It is suitable for regular scenarios only and might be damaged when exposed to corrosive environment.

Description of anti-corrosion performance level:

| Anti-corrosion Performance | Application |
|----------------------------|--|
| Professional | Coastal areas, wharfs, ports, ships and chemical factories, etc. |
| High | Areas exposed to acid rain; areas over 1.24 miles (1 km) away from the coastline |
| Standard | Regular environment with little corrosion exposure |

▪ Key Feature

- 8-ch IP cameras connectable via PoE interfaces, 4-channel analog HD camera access
- Up to 2MP resolution of H.264/H.265 compression for each IP camera.
- Pluggable dummy HDD for HDD/SSD with up to 2 TB capacity.
- User-friendly GUI providing easy and flexible operations.
- Pluggable 4G module and Wi-Fi module providing flexible data transmission solutions.
- Built-in GPS module precisely positioning the vehicle via the satellite and recording the location information in the video stream.
- Information collection interfaces collecting driving information such as left/right turn, braking, reversing, etc.
- Specialized aviation connectors ensuring signal stability.
- Shutdown delay (0 h to 6 h) and 24-hour scheduled startup/shutdown.
- Build-in super-capacitor prevents the mobile NVR from damage caused by sudden power outage.
- Wide-range power input (+9 VDC to +36 VDC).
- Power-off protection prevents key data loss.
- Aluminum die-cast chassis with no fan design well adaptable to working environment.
- Software-based firewall supported.
- Support accessing via WEB browser.
- Support Abnormal Detection.
- Support recording backup on redundant HDD/SSDs.



▪ Specification

| Model | | AE-MH0408 |
|------------------------------|---|--|
| Video/Audio Input | IP Camera | 8-ch connected via PoE interfaces |
| | Analog Camera | 4-ch HIK wiring sequence analog camera, Max. 1080P |
| | Two-way Audio | 1, integrated in EXT.DEV interface |
| Video/Audio Output | Video Output | Main output: 1, integrated in EXT.DEV interface VGA: 1 |
| | Audio Output | 1, integrated in EXT.DEV interface |
| Encoding/Decoding Parameters | Video Compression | H.264/H.265 |
| | Encoding Resolution | Main stream: 1080P/720P/WD1/4CIF Sub-stream: 720P/WD1/4CIF/2CIF/CIF |
| | Frame Rate | PAL: 1 to 25 fps; NTSC: 1 to 30 fps |
| | Audio Compression | G.711a/G.711u/G.722.1/G.726 |
| | Stream Type | Video, video & audio |
| | Audio Bitrate | 16 -64Kbps |
| | Dual Stream | Supported |
| Storage | HDD/SSD | 2 × 2.5 inch HDD/SSD, up to 2 TB for each HDD/SSD HDD/SSD data can be exported locally via this converter (optional) (A dummy HDD with 2 HDD/SSDs can be extended; Not for baseline. Note the HDD/SSD capacity when ordering) |
| | SD Card | 1 × SD card, up to 256 GB (not for baseline. Note the SD card capacity when ordering) |
| Wireless Network | 4G Dialing | 1 × 4G card slot, 1 × FAKRA antenna |
| | Available Module | 5G module(optional) |
| | Wi-Fi | WI2.4G model: 1 × 2.4 G Wi-Fi SMA antenna, WI5.8G model: 2 × 5.8 G Wi-Fi SMA antenna (Optional. 802.11B/G/N and 802.11AC are selectable. 1 antenna is needed for 802.11B/G/N module. 2 antennas are needed for 802.11AC module.) |
| Positioning | GNSS (Global Navigation Satellite System) | GPS (Global Positioning System) & GLONASS (Global Navigation Satellite System), 1 × FAKRA antenna |
| External Interface | Network Interface | <ul style="list-style-type: none"> ● Front panel :1 × 10M/100M RJ45 ● Rear panel: 1 × 10M/100M RJ45 <i>Note : The front and rear network ports are at same network segments</i> |
| | Serial Port | 2 × RS-232(<i>harness is optional</i>). 1 × RS-485. 1 × RS-485 (integrated in EXT.DEV interface) |
| | CAN interface | 2 |
| | USB Interface | <ul style="list-style-type: none"> ● Front panel: 1 × USB 2.0 ● Rear panel: 1 × USB 2.0 (5-pin aviation connector) |
| | Sensor-in | 4 high/low level signal inputs |
| | Alarm Input | 4 high/low level signal inputs, 1 pulse signal input, 1 BUTTON input |
| | Alarm Output | 2 relay signal outputs |
| General | Operating Method | Mouse, IR remote control, Web control, and display screen |
| | AI Function | Abnormal Detection |
| | G-sensor | Built-in |
| | Remote Control | Optional |
| | Power Supply | +9 to +36 VDC |
| | Consumption | <ul style="list-style-type: none"> ● Standby: ≤ 0.5 W |

| | |
|---------------------------------------|--|
| | <ul style="list-style-type: none"> ● Full load: ≤ 75 W <p>Note: Without peripheral and storage media ≤ 20 W</p> |
| Working Temperature | -10 °C to +60 °C (+14 °F to +140°F) |
| Working Humidity | 10% to 95% |
| Device Dimension (W × D × H) | 202 × 267.6 × 93.9 mm (7.95 × 10.54 × 3.7 inch) |
| Device Weight (Without Storage Media) | 3.31 kg (7.3 lb) |

▪ Available Model

AE-MH0408 (RJ45/M12)

AE-MH0408 (RJ45/M12) + AE-MP1460/GLF/S, (supports 4G dialing)

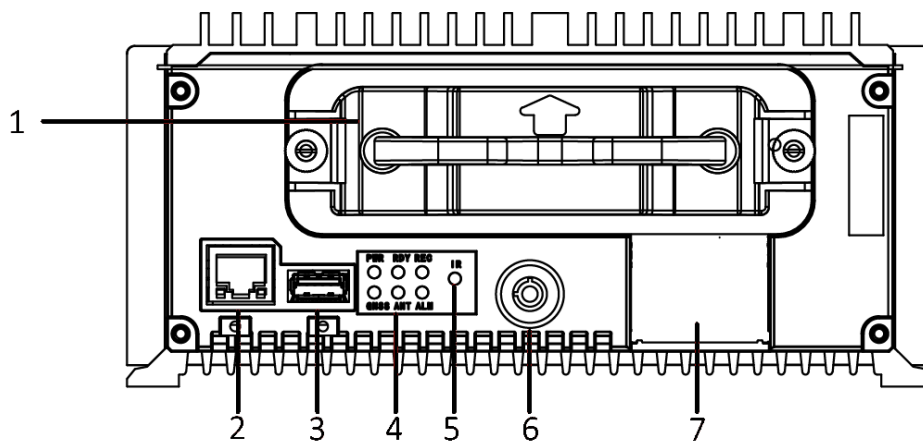
AE-MH0408 (RJ45/M12) + AE-MP1460/GLF/WI58/S, (supports 4G dialing and 5.8G Wi-Fi)

AE-MH0408 (RJ45/M12)+ AE-MP1460/GLF/WI/S, (supports 4G dialing and 2.4G Wi-Fi)

* 4G and Wi-Fi functions are supported only when AE-MP1460 Mobile Wireless Component is equipped with AE-MH0408.


▪ Physical Interface

▪ Front Panel




| No. | Name | No. | Name |
|-----|----------------------------------|-----|------------------|
| 1 | Dummy HDD/SSD | 4 | Power indicator |
| 2 | 10M/100M RJ45 Ethernet interface | | Ready indicator |
| 3 | USB 2.0 interface | | Record indicator |
| 5 | IR receiver | | GNSS indicator |
| 6 | Lock/Unlock the hard disk box. | | ANT indicator |
| 7 | SD card slot | | Alarm indicator |

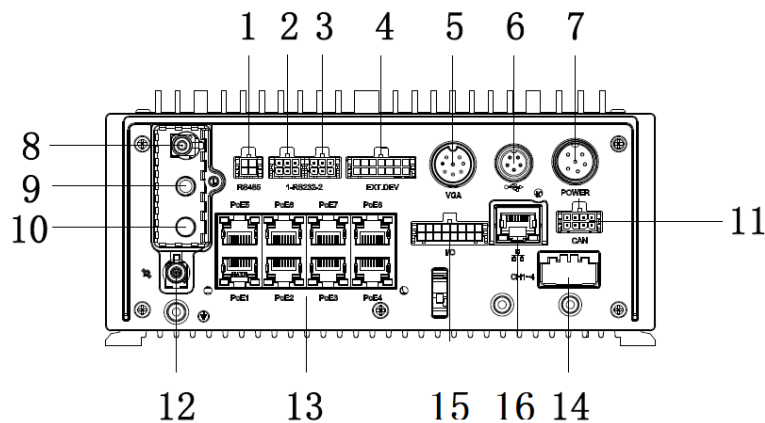▪ Rear Panel(RJ45)



| No. | Name | No. | Name |
|-----|---|-----|---|
| 1 | RS-485 interface | 9 | Aux Wi-Fi antenna interface |
| 2 | RS-232 interface | 10 | Main Wi-Fi antenna interface |
| 3 | RS-232 interface | 11 | CAN |
| 4 | EXT.DEV interface: RS-485 communication interface, two-way audio interface, and CVBS video output | 12 | GNSS antenna interface |
| 5 | VGA video output interface | 13 | 8 × PoE interface |
| 6 | USB interface of 5-pin aviation plug | 14 | 1-4 way audio and video cable |
| 7 | 6-pin aviation plug for power supply | 15 | I/O interface: 4-ch alarm inputs, 4-ch sensor in; 1-ch pulse signal input |
| 8 | Main 3G/4G antenna interface | 16 | 1 × 10M/100M RJ45 Ethernet interface |








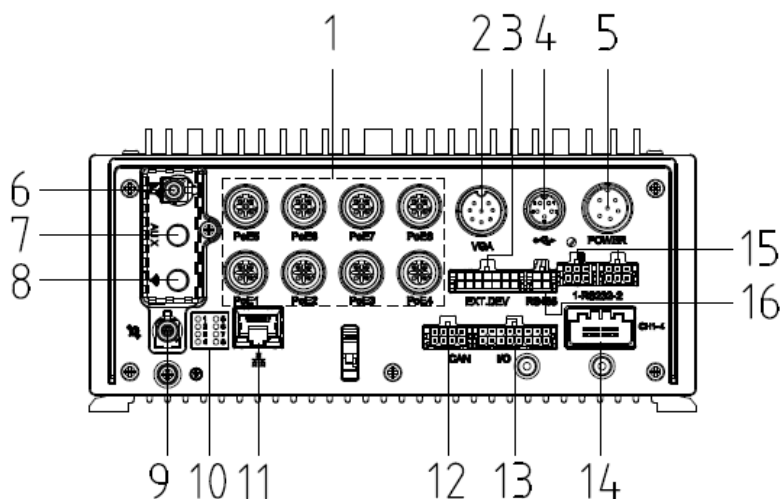
▪ Rear Panel(M12)



| No. | Name | No. | Name |
|-----|---|-----|---|
| 1 | 8 × PoE interface | 9 | GNSS antenna interface |
| 2 | VGA video output interface | 10 | IPC camera Indicator |
| 3 | EXT.DEV interface: RS-485 communication interface, two-way audio interface, and CVBS video output | 11 | 1 × 10M/100M RJ45 Ethernet interface |
| 4 | USB interface of 5-pin aviation plug | 12 | CAN |
| 5 | 6-pin aviation plug for power supply | 13 | I/O interface: 4-ch alarm inputs, 4-ch sensor in; 1-ch pulse signal input |


| | | | |
|---|---|----|-------------------------------|
| 6 | Main 3G/4G antenna interface | 14 | 1-4 way audio and video cable |
| 7 | Aux Wi-Fi antenna interface | 15 | RS-232 interface |
| 8 | Main Wi-Fi antenna interface pulse signal input | 16 | RS-485 interface |

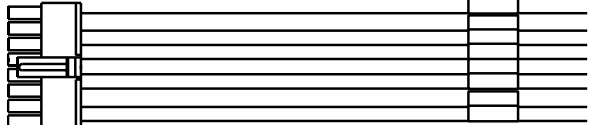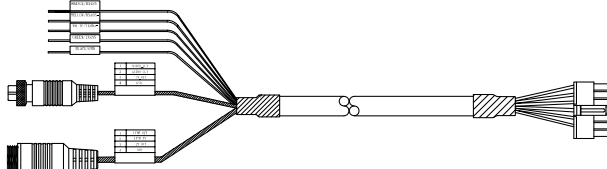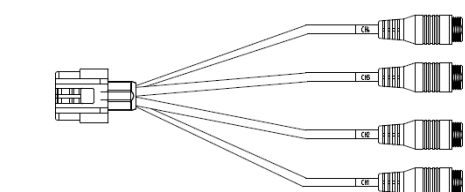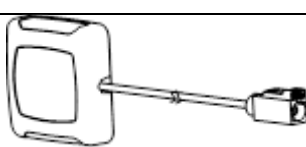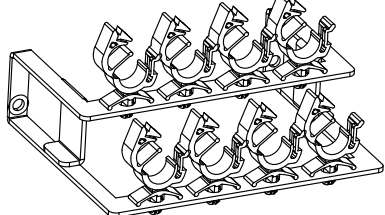▪ **Packing List**

| Description | Quantity | Picture |
|--|----------|--|
| Fuse | 2 |  |
| Power cord | 1 |  |
| Key | 1 |  |
| Alarm line | 1 |  |
| Extension cable | 1 |  |
| 1-4 way audio and video cable | 1 |  |
| GPS antenna | 1 |  |
| Network cable clip(M12 series not included) | 9 |  |
| Network cable bracket(M12 series not included) | 1 | |

Peripheral Connection

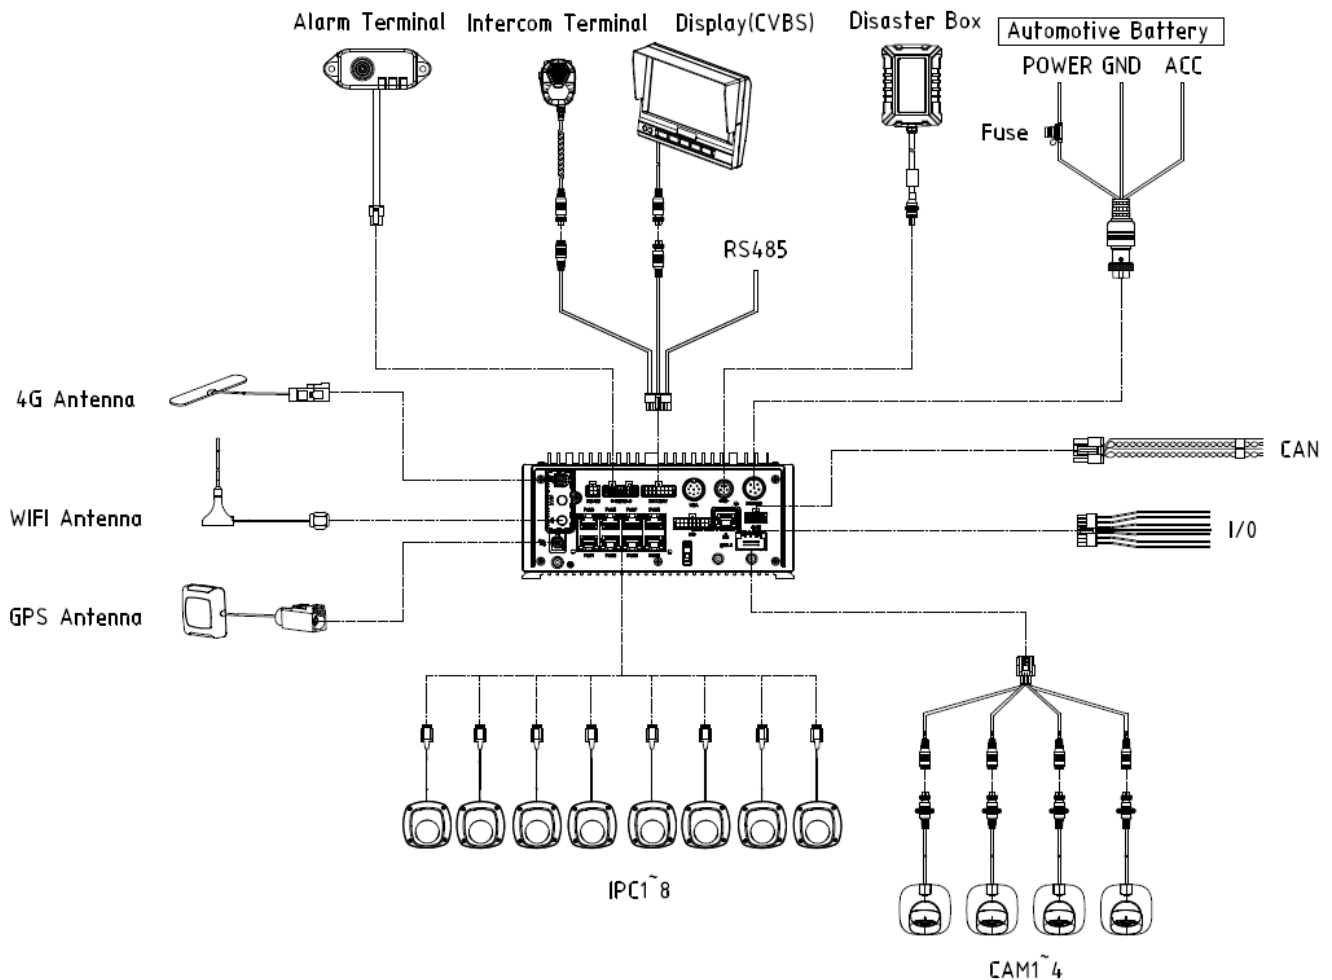* Here we take example of RJ45 series.



HIKVISION®

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com

Hikvision USA
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Australia
T +61-2-8599-4233
salesau@hikvision.com

Hikvision India
T +91-22-28469900
sales@pramahikvision.com

Hikvision Canada
T +1-866-200-6690
sales.canada@hikvision.com

Hikvision Thailand
T +662-275-9949
sales.thailand@hikvision.com

Hikvision Europe
T +31-23-5542770
sales.eu@hikvision.com

Hikvision Italy
T +39-0438-6902
info.it@hikvision.com

Hikvision Brazil
T +55 11 3318-0050
Latam.support@hikvision.com

Hikvision Turkey
T +90 (216)521 7070- 7074
sales.tr@hikvision.com

Hikvision Malaysia
T +601-7652-2413
sales.my@hikvision.com

Hikvision UK & Ireland
T +01628-902140
sales.uk@hikvision.com

Hikvision South Africa
Tel: +27 (10) 0351172
sale.africa@hikvision.com

Hikvision France
T +33(0)1-85-330-450
info.fr@hikvision.com

Hikvision Kazakhstan
T +7-727-9730667
nikia.panfilov@hikvision.ru

Hikvision Vietnam
T +84-974270888
sales.vt@hikvision.com

Hikvision UAE
T +971-4-4432090
salesme@hikvision.com

Hikvision Singapore
T +65-6684-4718
sg@hikvision.com

Hikvision Spain
T +34-91-737-16-55
info.es@hikvision.com

Hikvision Tashkent
T +99-87-1238-9438
uzb@hikvision.ru

Hikvision Hong Kong
T +852-2151-1761
info.hk@hikvision.com

Hikvision Russia
T +7-495-669-67-99
saleru@hikvision.com

Hikvision Korea
T +82-(0)31-731-8817
sales.korea@hikvision.com

Hikvision Poland
T +48-22-460-01-50
info.pl@hikvision.com

Hikvision Indonesia
T +62-21-2933759
Sales.Indonesia@hikvision.com

Hikvision Colombia
sales.colombia@hikvision.com