

Brighten Every Moment

# SOLID PLUS SERIES

Indoor LED Displays



HOB





High Protection



LED Lamp Repair Machine

## Superior Cabinet

- **Super Slim – 29.5 mm**  
Combining elegance and robustness
- **Ultra Light – 17.3 kg/m<sup>2</sup>**  
Facilitating effortless installation
- **Exceptionally Robust**  
Tensile strength of up to 2,000N  
Splicing of 50 rows / 17 m, no deformation

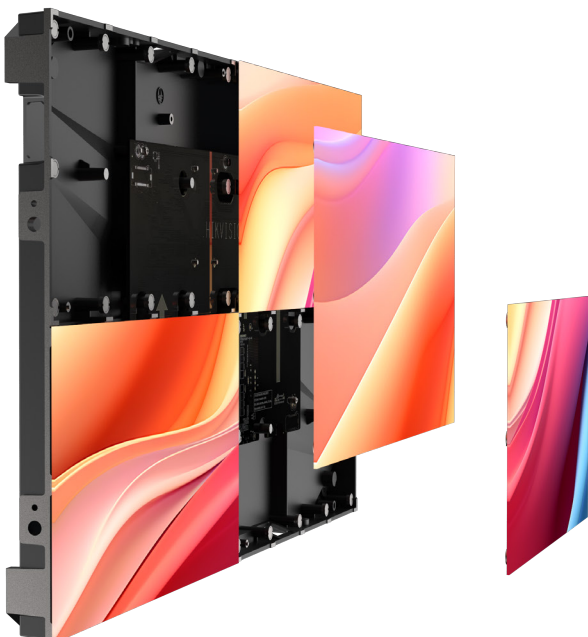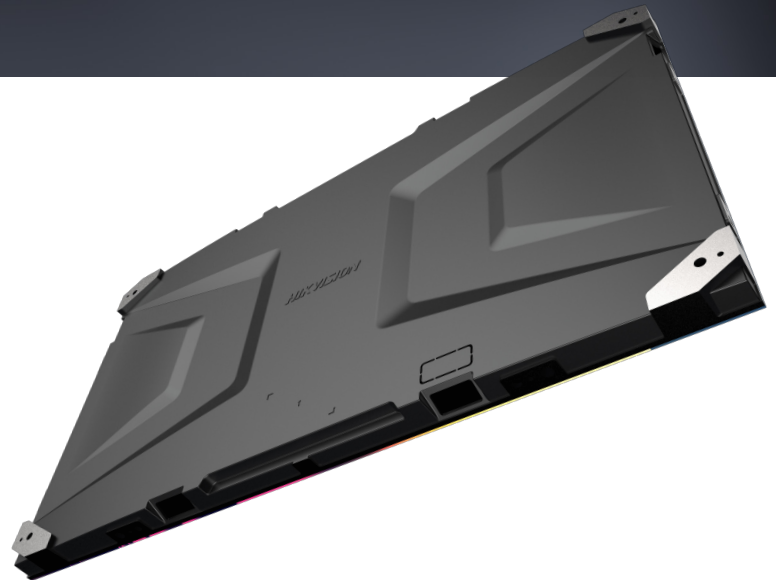

## Convenient Splicing & Installation

- **Big Board – 600\*337.5 mm, 16:9**  
More accurate and easier splicing, compatible with diverse resolutions
- **Flexible Wiring**  
Cascading both horizontally and vertically, saving wiring costs
- **Removable Back Frame Plate**  
With cables passing through, preventing tangled cords at the screen bottom

# Unique Advantages



## Higher Protection Level

- Enhanced protection with glue, resistant against water, moisture, corrosion, dust, static, and oxidation



## Better Visual Performance

- A matte screen to alleviate eye strain
- Increased contrast ratio



## Lamp Repair Machine

- A self-developed LED lamp repair machine to improve HOB lamp board repairs and address dead LED issues



# Application Scenarios



Command Center



Auditorium & Lecture Hall



Meeting Room



Retail Store & Cinema



Studio

# Key Spec

	DS-D4012CW-2FQ	DS-D4015CW-2FQ	DS-D4018CW-2FQ
Pixel Structure		HOB	
Pixel Pitch (mm)	1.25	1.56	1.8
Cabinet Dimension (W × H × D, mm)	600 × 337.5 × 29.5 (23.622" × 13.287" × 1.161")		
Cabinet Resolution (W × H)	480 × 270	384 × 216	240 × 136
Cabinet Weight	3.4 Kg(7.496 lb)		
Cabinet Material	Aluminium die casting		
Protection Level	IP65 (Module)		
Brightness (nits)	600		
Viewing Angle	160°(H)/160°(V)		
Contrast Ratio	3000:1		
Peak Consumption (W/m <sup>2</sup> )	≤ 460	≤ 390	≤ 400
Refresh Rate (Hz)	3840		
Grey Level (bit)	16		



www.hikvision.com  
support@hikvision.com

Search Hikvision

