

HOW TO


Add Door Station to NVR for Preview and Playback – Via Web

Here we take iDS-7716NXI-M4/X and DS-KD8003-IME1(B) as an example.


Add Device to NVR

Go to Device Access > Device > Access Control Device, click Add and enter door station information to add door station, click Save.

➤ The NVR firmware version should be **5.04.050** or above.

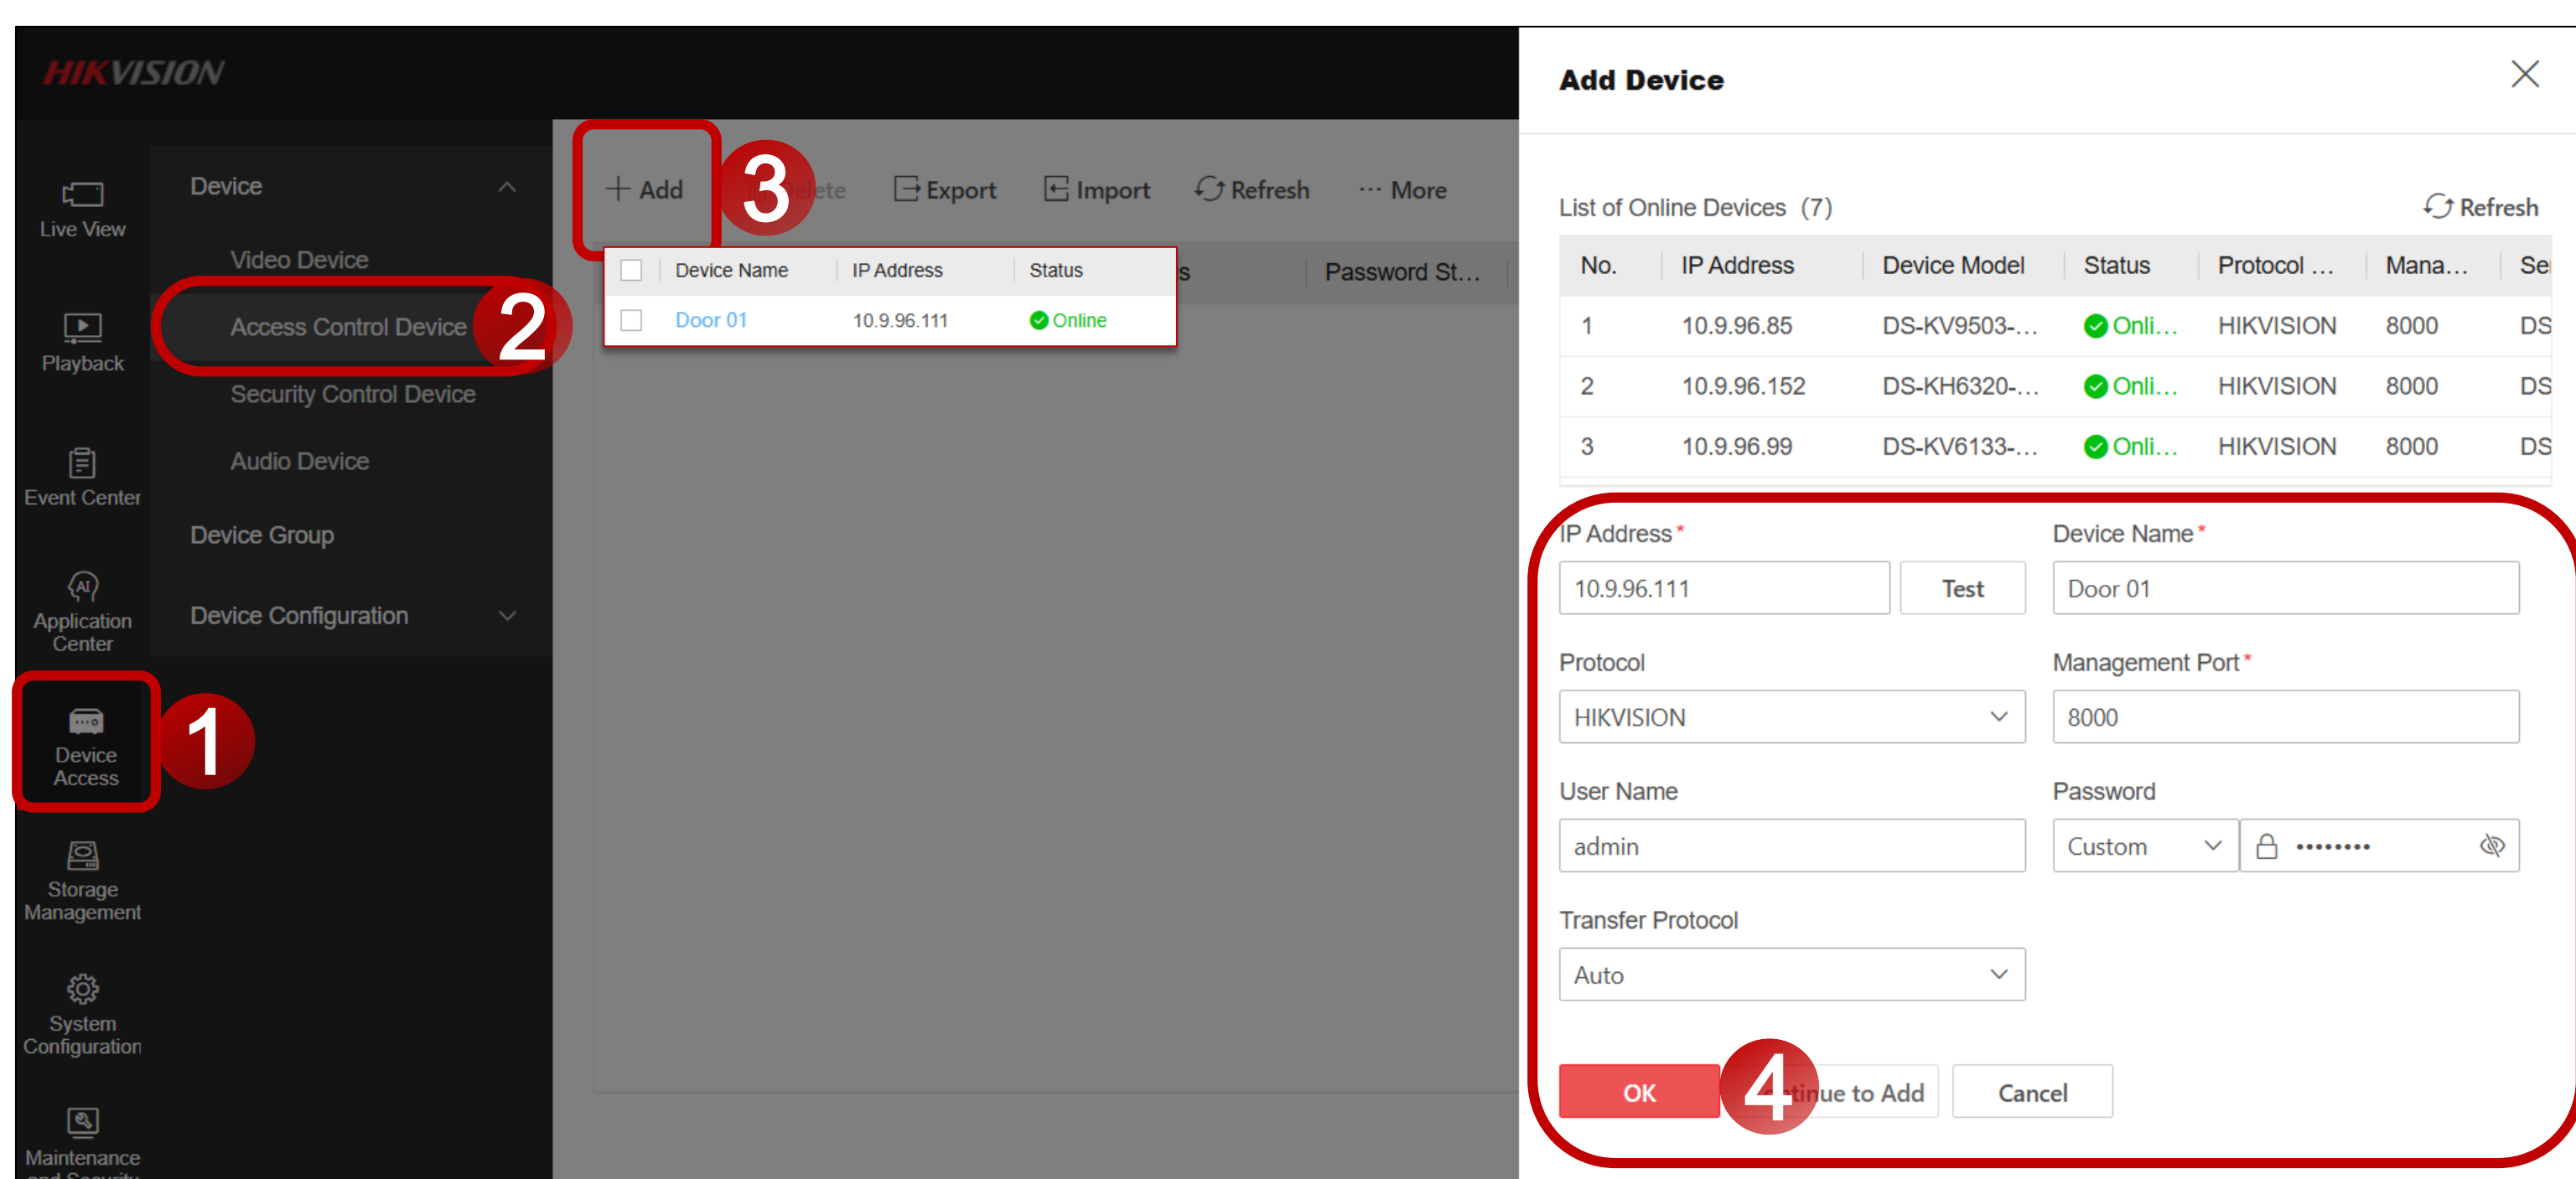


When add successfully, you can find device status is online, you can also turn to Live View to confirm the live view is normal.

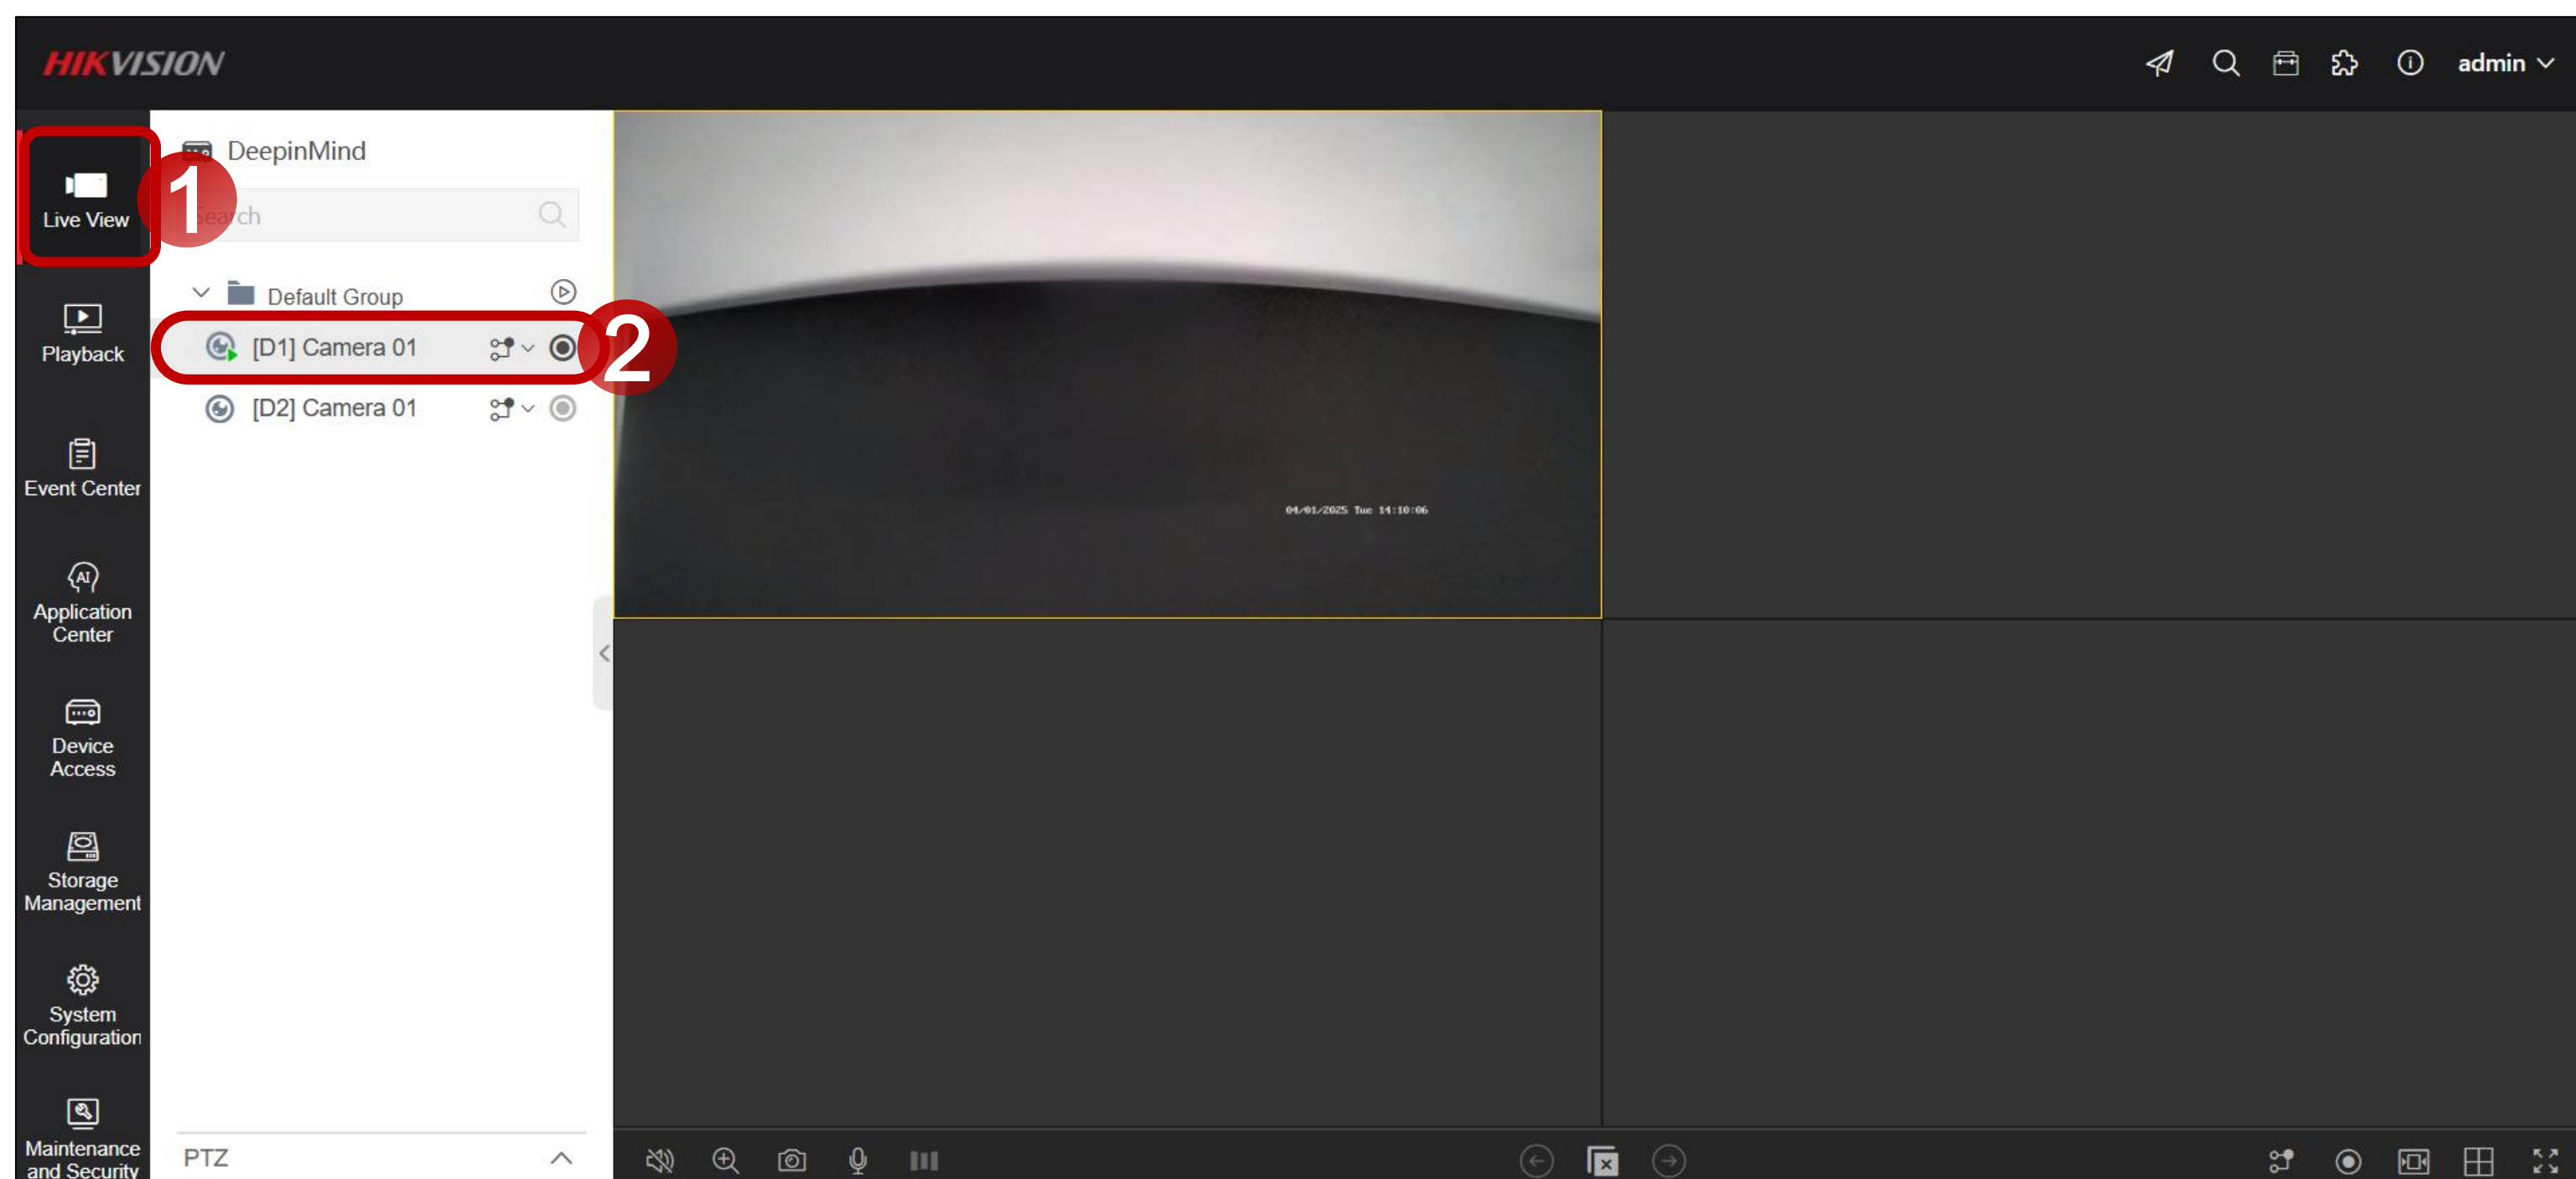

Set Recording Schedule

Go to **Storage Management > Storage Schedule > Video Recording**, set the schedule, click save.

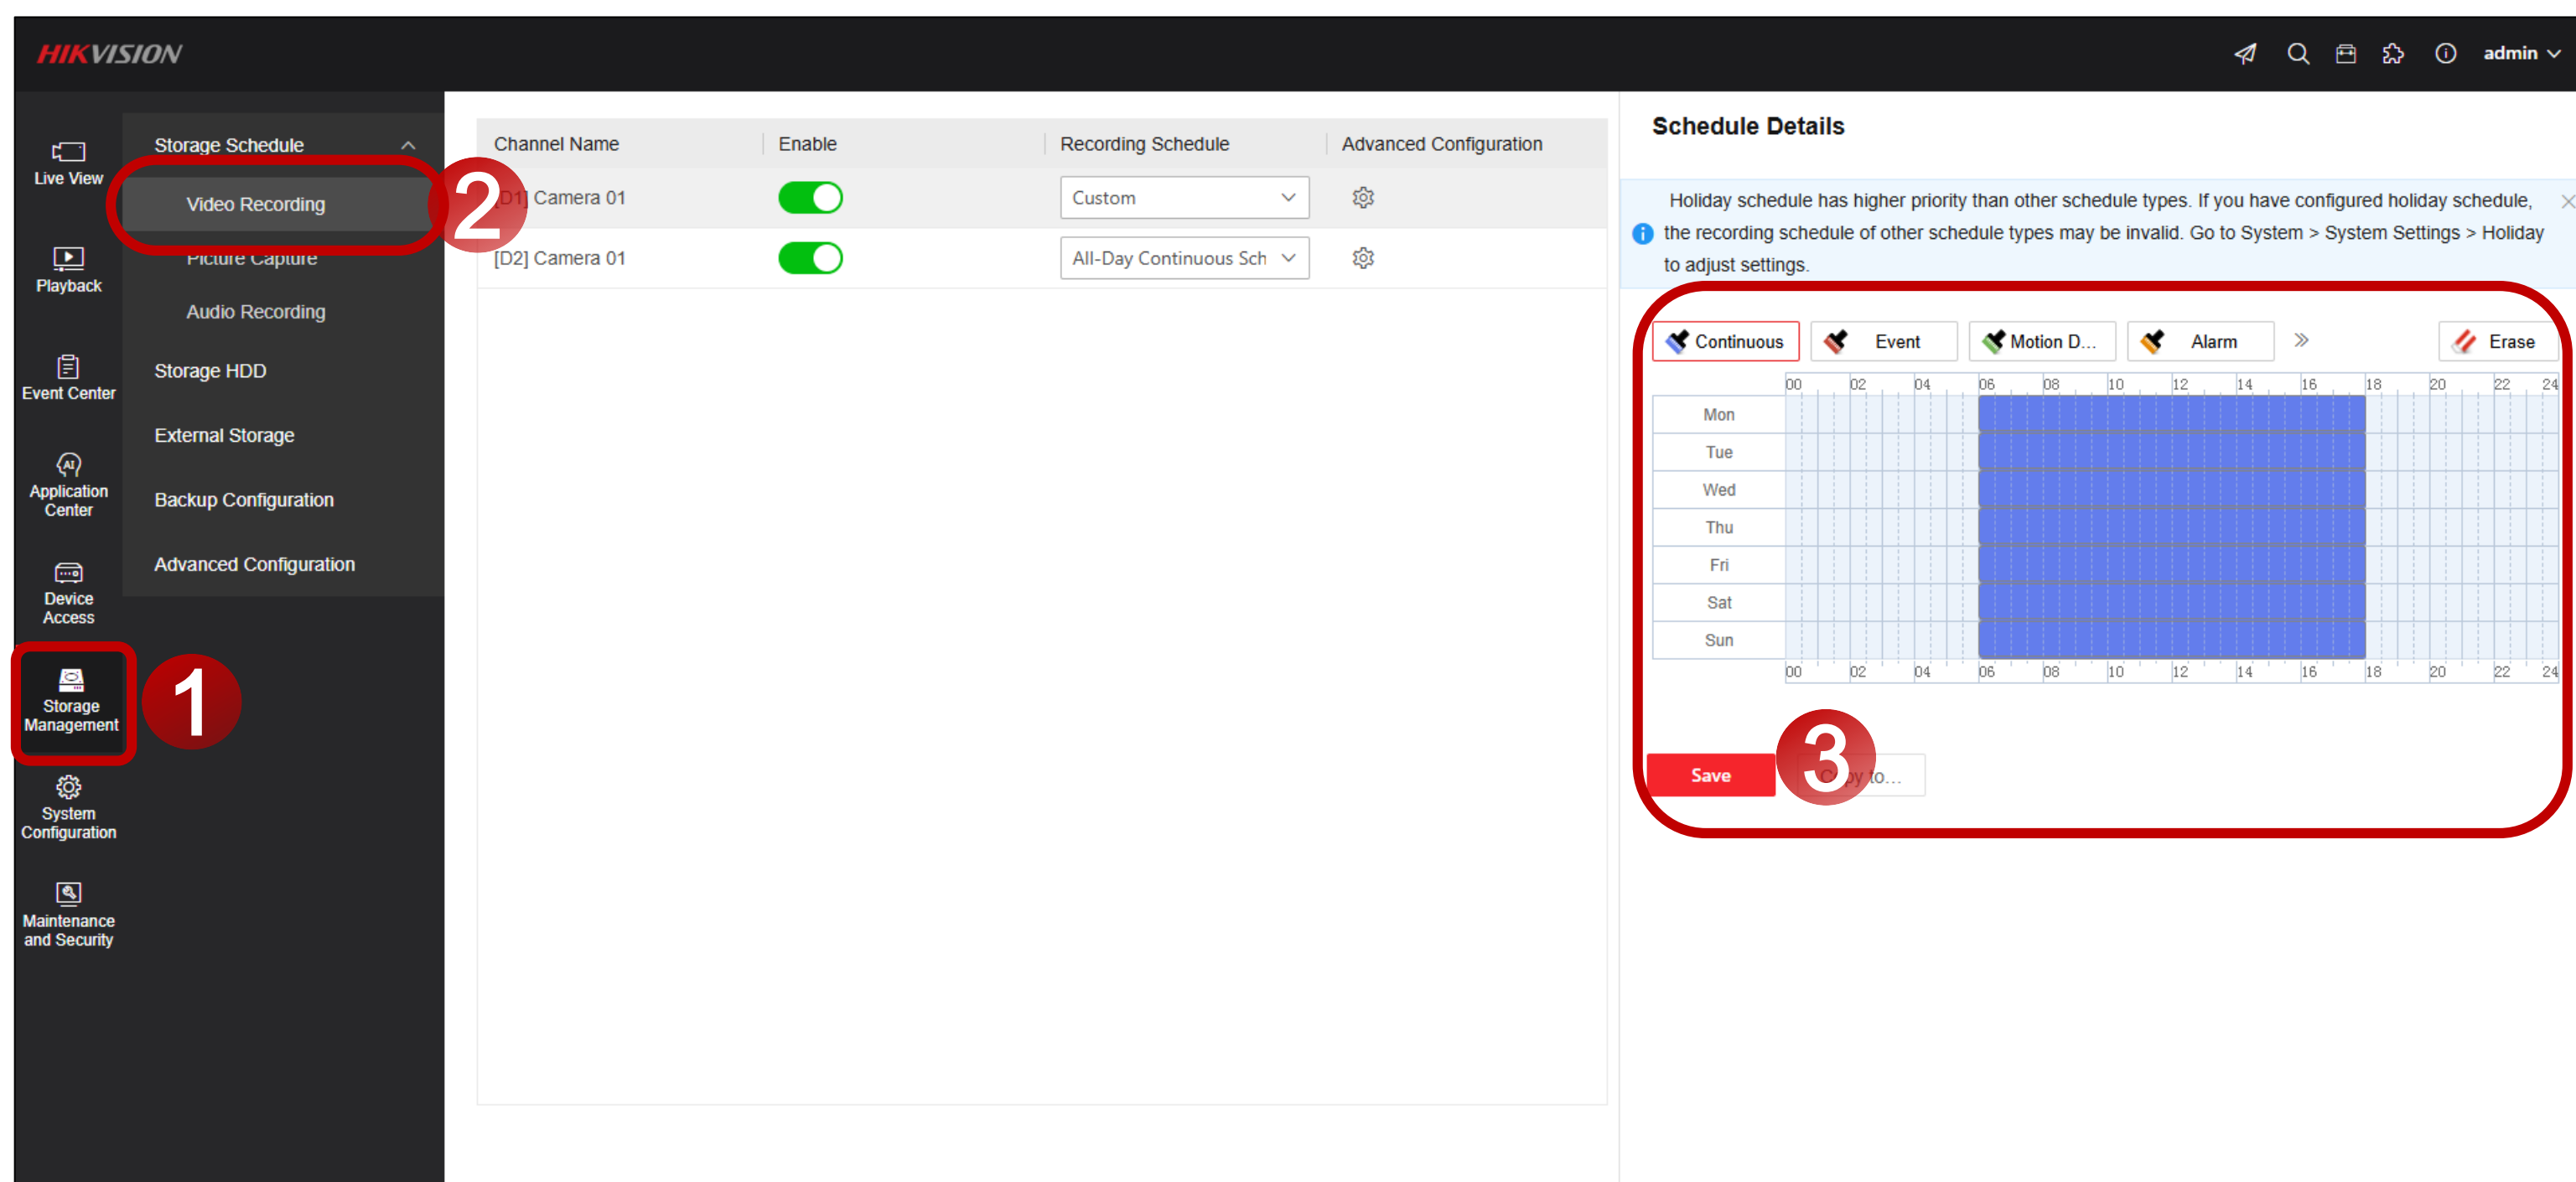

Go to **Playback**, choose the channel, you can slide the time bar to check the playback video.

